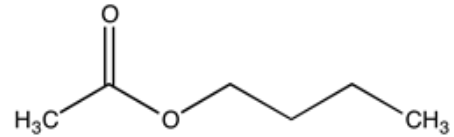


Identification

C₆H₁₂O₂
M = 116,16 g/mol
CAS [123-86-4]
EC number: 204-658-1
Taric code: 2915 33 00

**Synonyms**

Acetic acid n-butyl ester

Applications

analytical chemistry, laboratory reagent, manufacturing of lacquers, in the textile industry, photography, plasticizer, manufacture of glass.

Specifications

assay (G.C.).....	min. 99 %	acidity (as CH ₃ COOH).....	max. 0,01 %
identity (IR-spectrum).....	passes test	residue on evaporation.....	max. 0,005 %
density (20°/4°).....	0,879 - 0,881	water (K.F.).....	max. 0,05 %

Physical data

- Density: 0,88 g/cm³
- Solub. in water: (20 °C): 7 g/l
- Melting point: -77 °C
- Boiling point: 127 °C
- Flash point: 27 °C
- Ignition temperature: 370 °C
- Vapour pressure: (20 °C) ~ 13 hPa
- Refraction index: (n 20 °C/D) 1,3941
- Viscosity: (25 °C) 0,69 mPas
- Dipolar moment: (22 °C) 1,84 Debye
- Dielectric const.: (20 °C) 5,0
- Evap. heat: (126 °C) 309 KJ/kg
- Saturation conc.: (20 °C) 62 g/m³
- Expl. limit (upper): 7,5 Vol%
- Expl. limit (lower): 1,2 Vol%

Safety - GHS

Signal Word: Warning

**Hazard Statements:**

H226: Flammable liquid and vapour.
H336: May cause drowsiness or dizziness.
EUH066: Repeated exposure may cause skin dryness or cracking.

Precautionary Statements:

P210: Keep away from heat / sparks / open flames / hot surfaces. - No smoking.
P241: Use explosion-proof electrical / ventilating / lighting / equipment.
P303+P361+P353: IF ON SKIN (or hair): Remove / Take off immediately all contaminated clothing. Rinse skin with water / shower.
P370+P378: In case of fire: Use ... for extinction.
P405: Store locked up.
P501a: Dispose of contents / container in accordance with local / regional / national / international regulations.

Transport/storage

- ADR: 3 F1 III • UN 1123 • BUTYL ACETATES
- IMDG: 3 III • UN 1123 • BUTYL ACETATES
- IATA/ICAO: 3 III • UN 1123 • BUTYL ACETATES
- PAX: 309
- CAO: 310
- 10°C - 30°C